OPERATION MODE : NORMALLY CLOSED
REPEATABILITY OF SKIP SIGNAL : 0.001mm
RECOMMENDED OPERATING SPEED : 50~200mm/min
RATING : DC24V 20mA(Max)
(RECOMMENDED 10mA) NON-INDUCTIVE LOAD
DEGREES OF PROTECTION : IEC IP67

PLANE A(Z1) DATUM MUST BE GRIND AFTER ASSEMBLED
PERPENDICULARITY, PARALLELISM 0.005/5

出 05.1.06 図 承認

CONTACT
TUNGSTEN CARBIDE φ5 FLAT
STROKE(OVER TRAVEL) 2
CONTACT FORCE 2N

CORROSION RESISTANCE

NAME PLATE (X2)

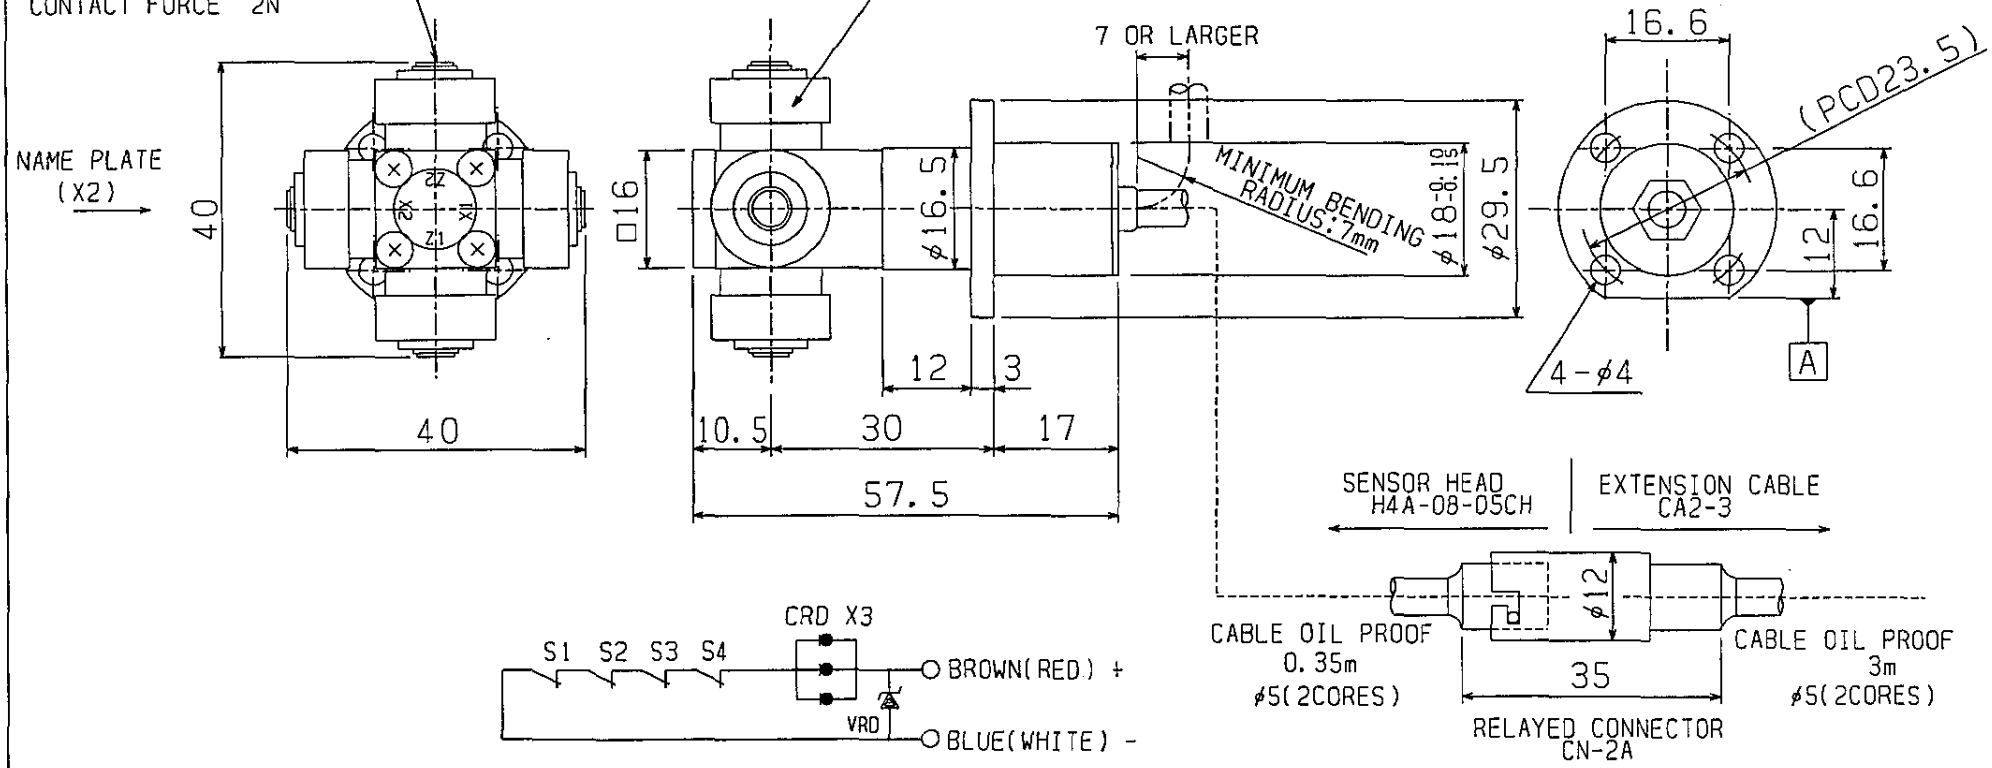

SET NUMBER: H4A-08-05C

COMPOSITION
- SENSOR HEAD H4A-08-05CH
- EXTENSION CABLE CA2-3

MINIMUM BENDING RADIUS:7mm

CABLE COLORS HAS CHANGED ON 5. JANUARY. 2005. RED→BROWN, WHITE→BLUE

A4 1/1	NAME	TOOL SETTING PROBE
APR / CHK / DRA	DRAWING NUMBER	H4A-08-05C
01.8.19 HIJIKATA	METROL LTD	METROL. LTD

H4A¥EN¥4A0805CE