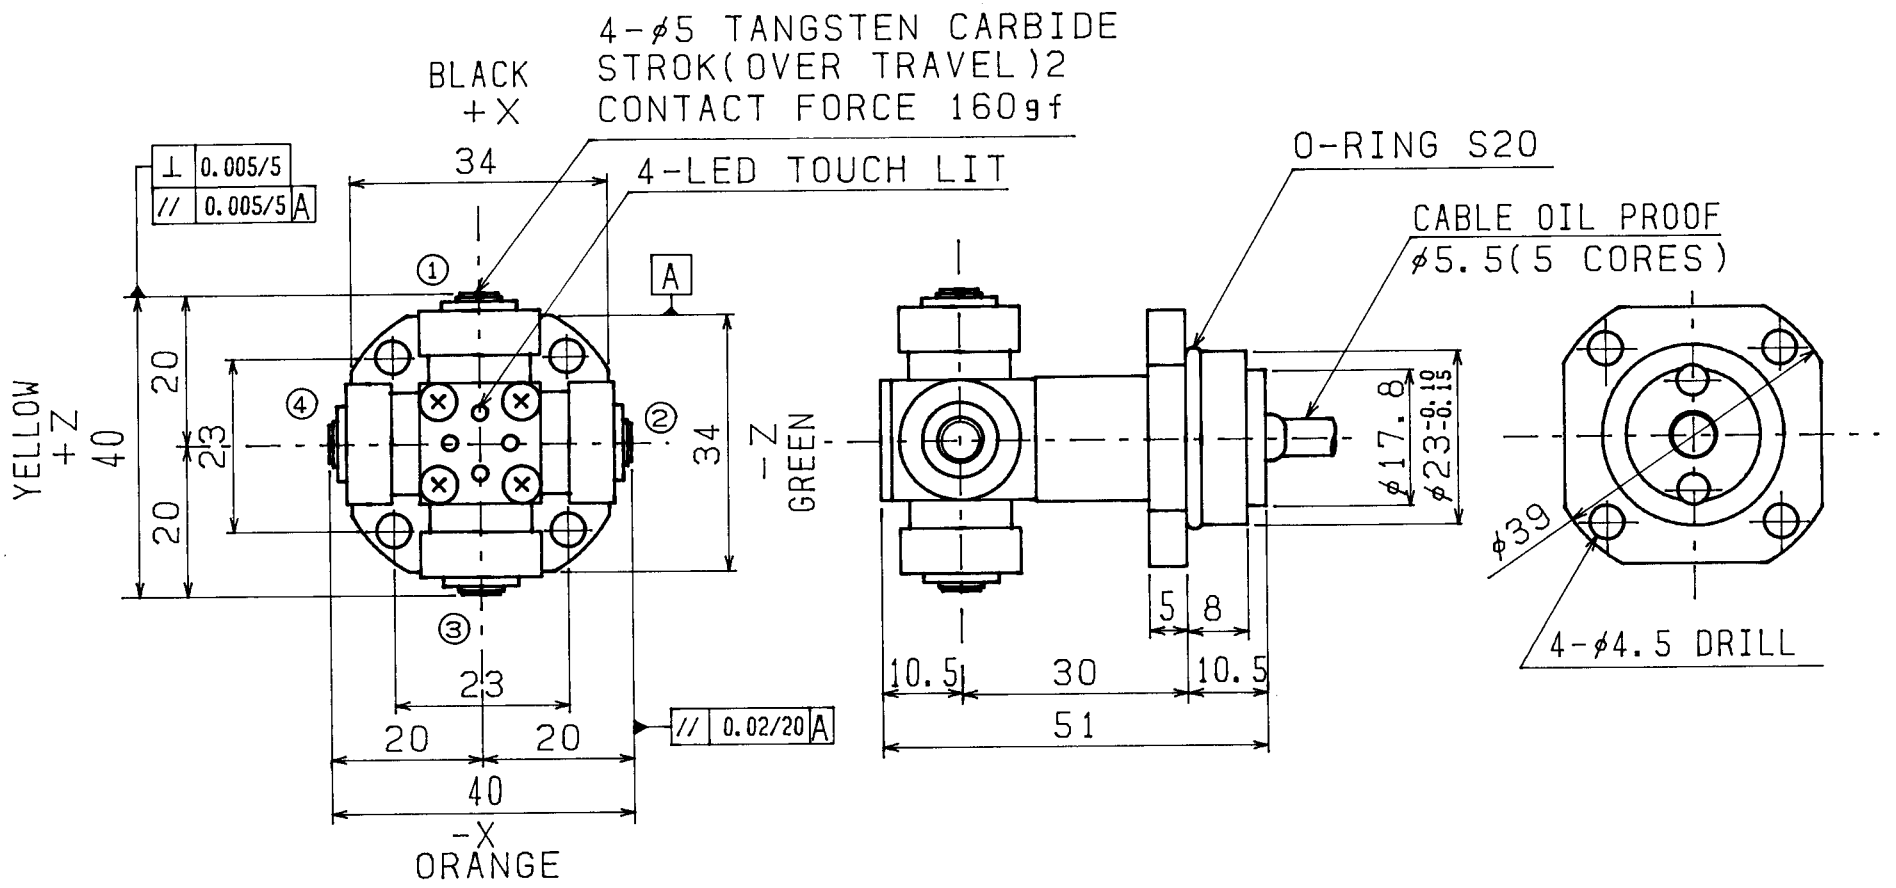

PHN2P-01

BLOCK DIAGRAM

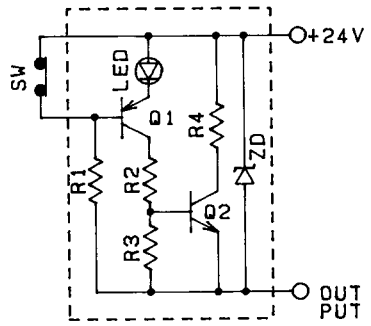

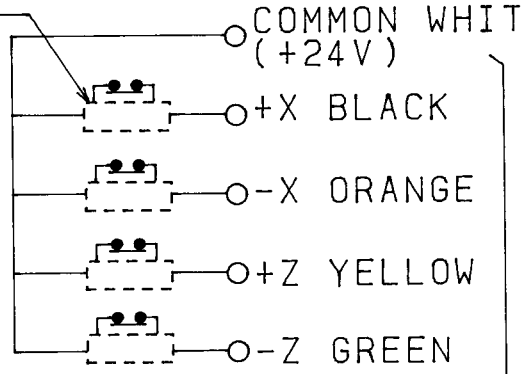

TOUCH ON
24V OUTPUT

CONTACT MECHANISM:
NORMALLY CLOSED
CONTACT RATING:
DC24V-20mA(MAX.)
REPEAT ACCURACY:
0.001mm
DEGREES OF PROTECTION:
IEC IP67
OFF LEAKAGE CURRENT:
0.5mA(MAX.)/1-DIRECTION

FILE NO. 4A-18-11 レイヤ1

NAME	TOOL SETTING PROBE
DRAWING NUNBER	H-4A-18-11

METROL LTD. メトロール