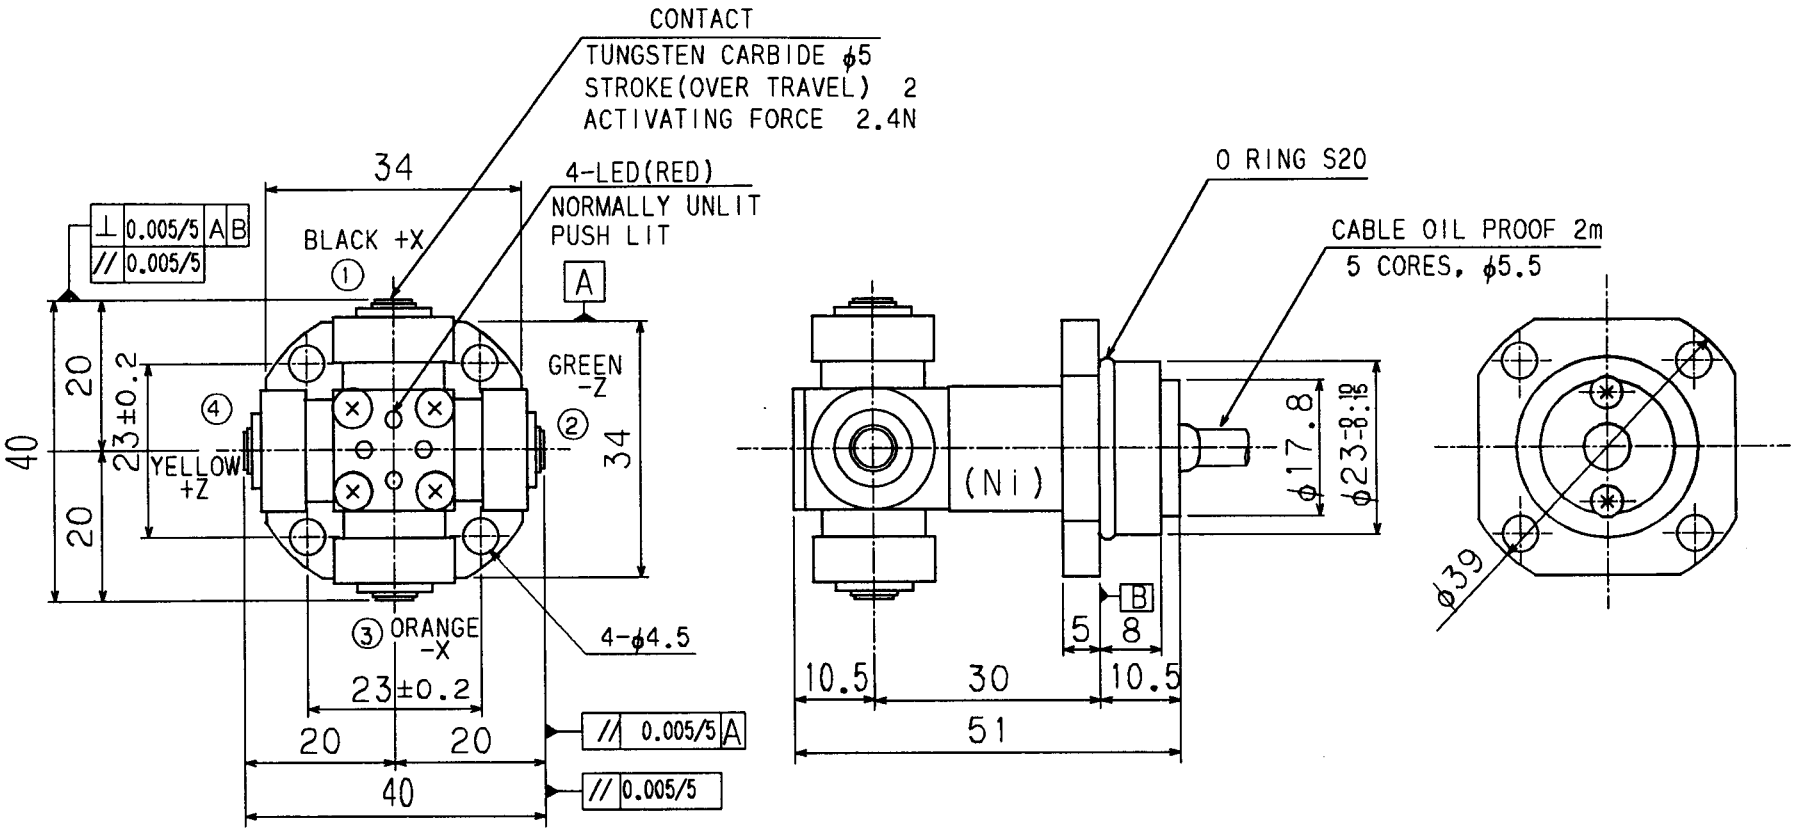

REPEATABILITY OF SKIP SIGNAL : 0.001mm

RECOMMENDED OPERATING SPEED : 40~100mm/min

CONTACT RATING : DC24V 20mA

(5~10mA RECOMMENDED) NON-INDUCTIVE LOAD

DEGREES OF PROTECTION : IEC IP67

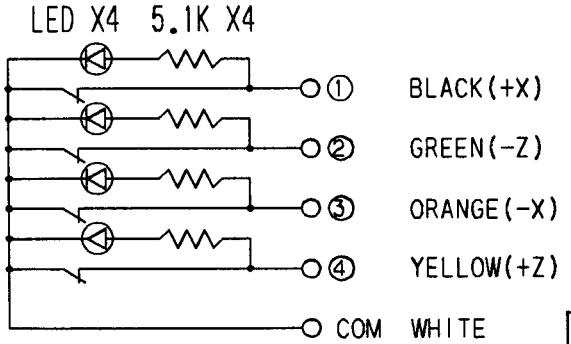

SET NUMBER H4A-18-13S

COMPOSITION
- SENSOR H4A-18-13H
- POLARITY CONVERTER UNIT BA-4A

NAME	TOOL SETTING PROBE	
DRAWING NUMBER	H4A-18-13S	

APR	CHK	DRA	
	K.EBINA	99.9.21 HIJIKATA	1/1

METROL LTD. METROL

E:¥H4A18¥4A1813E