REPEATABILITY OF SKIP SIGNAL : 0.001mm

OPERATING SPEED 5m/min.MAX
50~200mm/min.RECOMMENDED.

CONTACT RATING : DC12~24V 20mA(Max)
(RECOMMENDED 10mA) NON-INDUCTIVE LOAD

DEGREES OF PROTECTION : IEC IP67

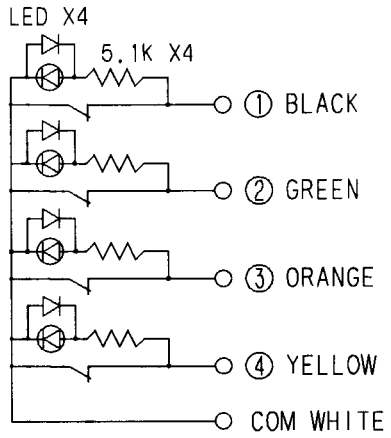

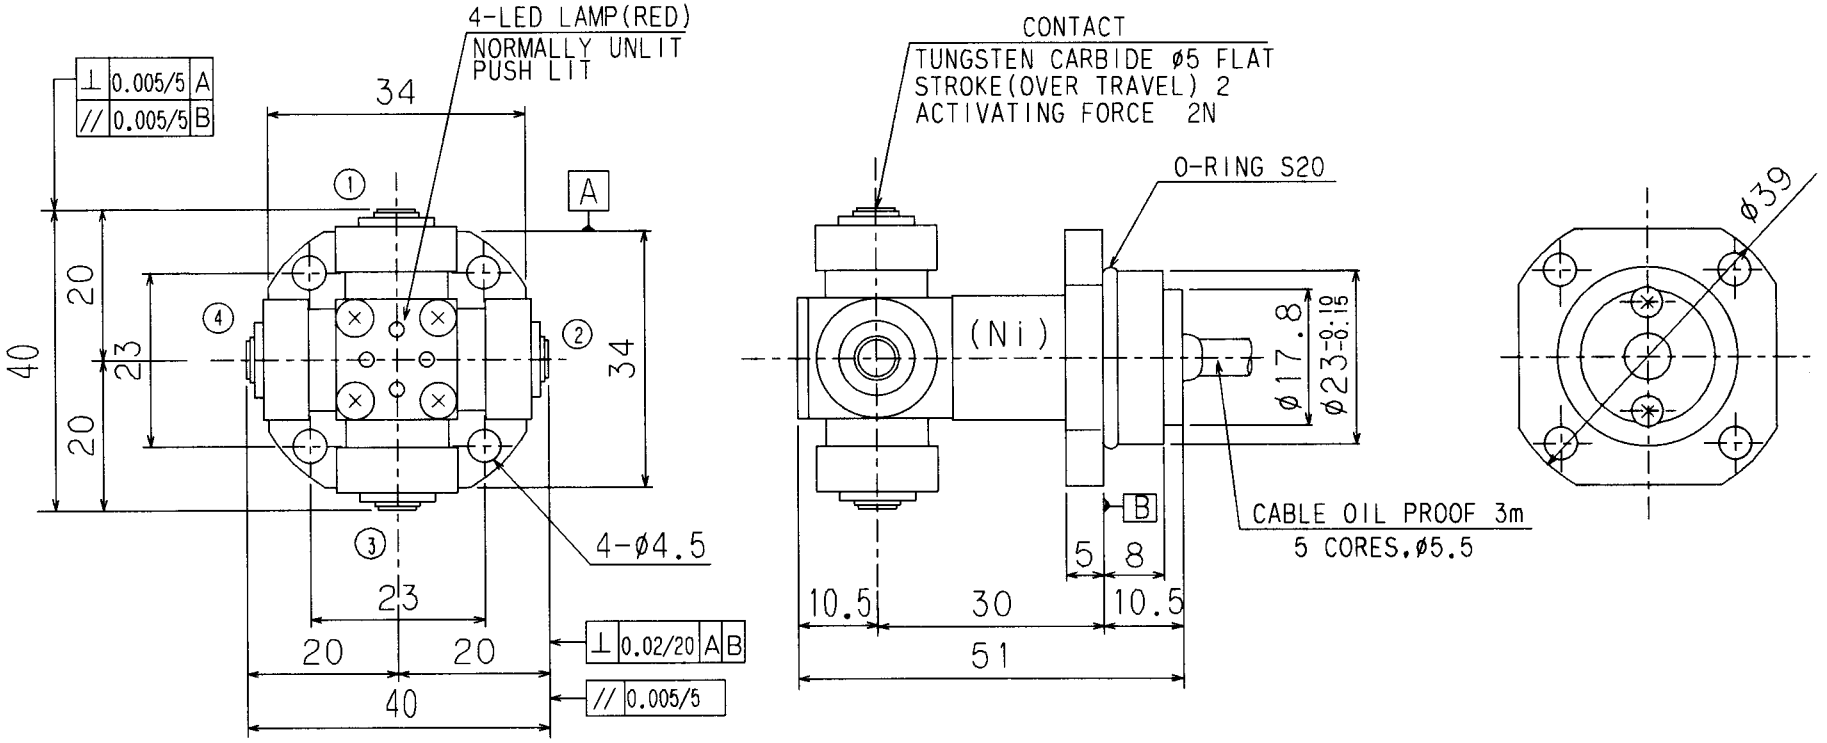

				NAME	TOOL SETTING PROBE
				DRAWING NUMBER	H4A-18-34
APR	CHK	DRA			
	K.EBINA	01.11.13 HIJIKATA	1/1	METROL LTD.	METROL

¥H4A18¥4A1834E