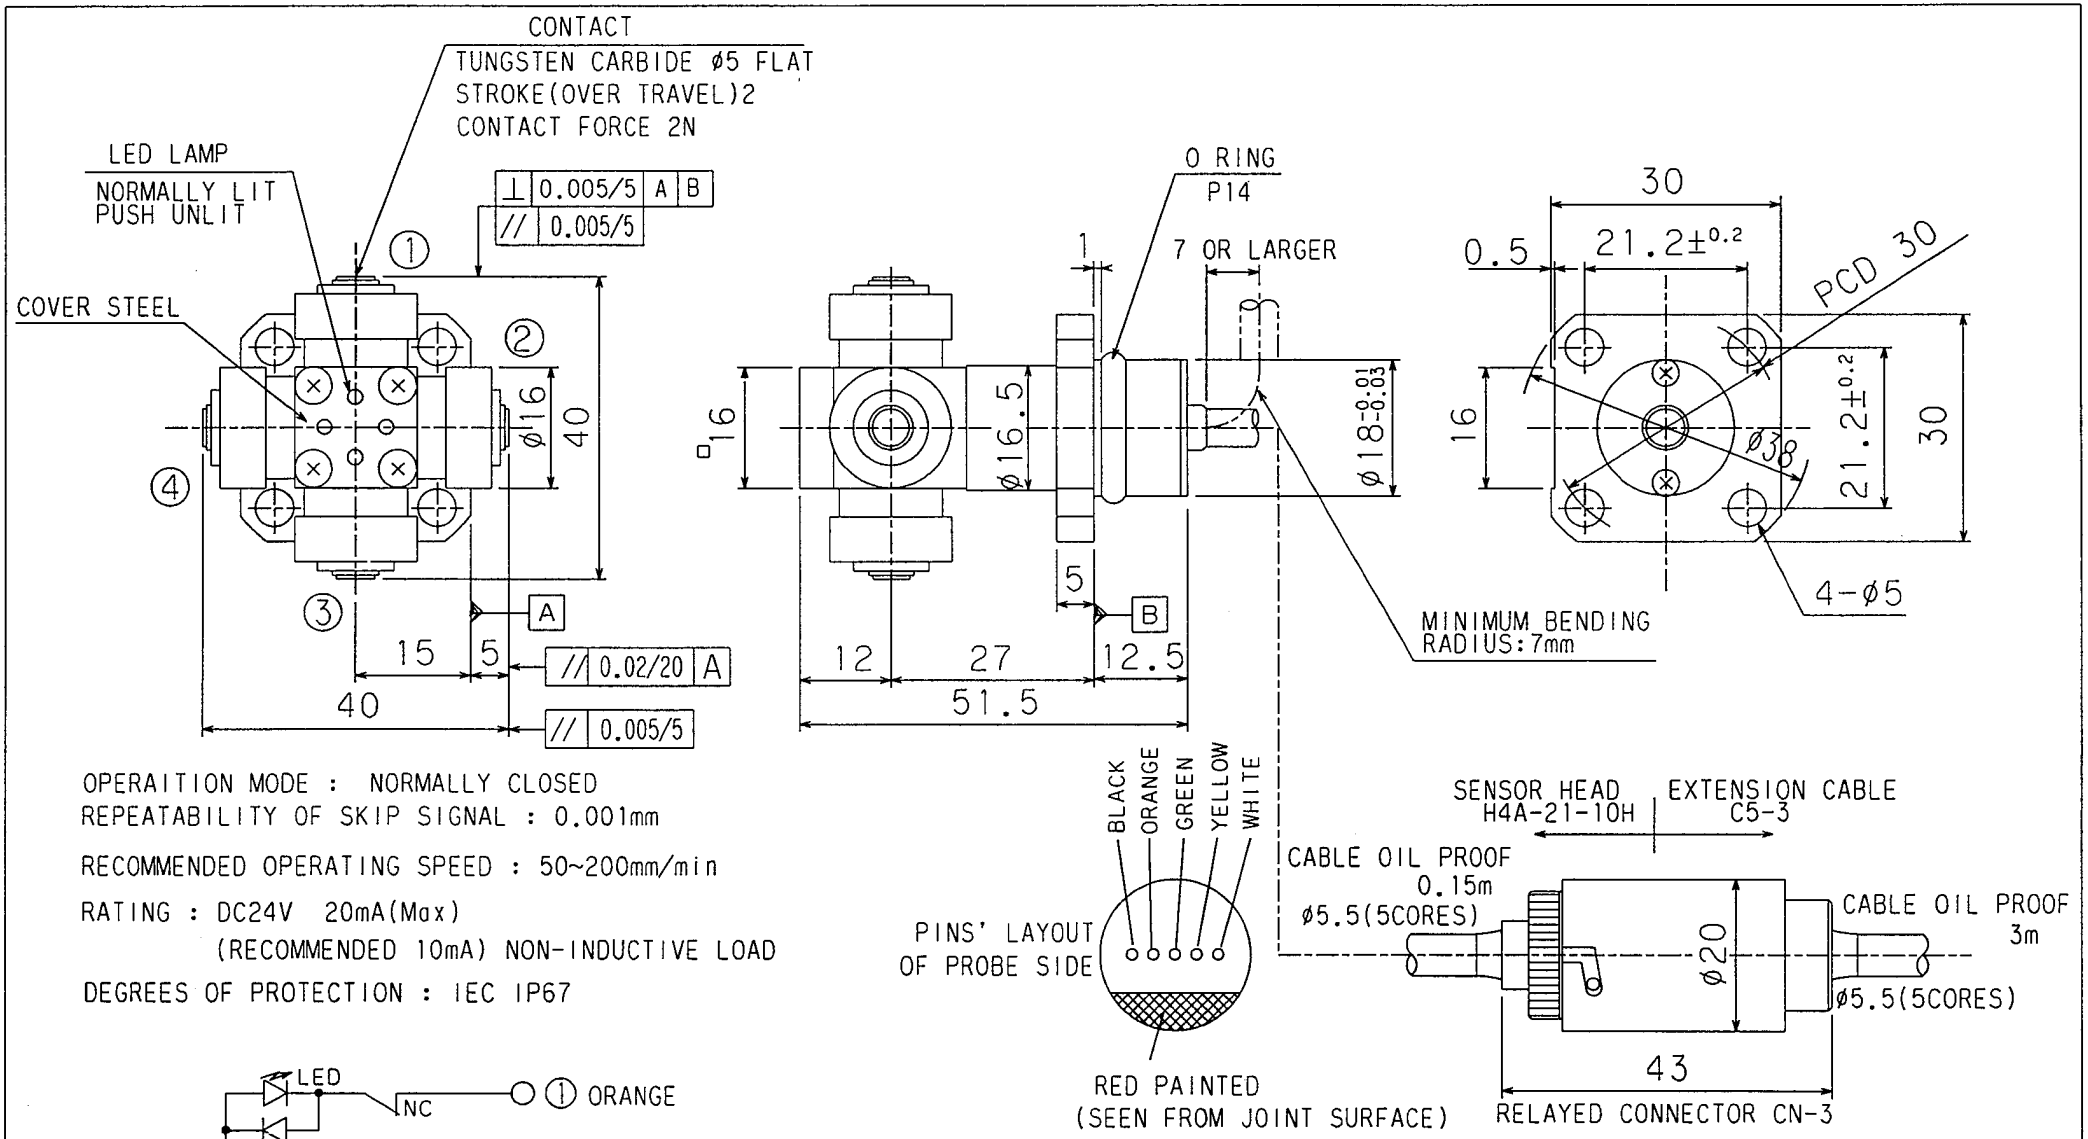

OPERAITION MODE : NORMALLY CLOSED
REPEATABILITY OF SKIP SIGNAL : 0.001mm
RECOMMENDED OPERATING SPEED : 50~200mm/min
RATING : DC24V 20mA(Max)
(RECOMMENDED 10mA) NON-INDUCTIVE LOAD
DEGREES OF PROTECTION : IEC IP67

SET NUMBER H4A-21-10S

COMPOSITION
- SENSOR HEAD H4A-21-10H
- EXTENSION CABLE C5-3

✱ MINIMUM BENDING RADIUS:7mm

A4 1/1			NAME	TOOL SETTING PROBE	
APR	CHK	DRA	DRAWING NUMBER	H4A-21-10S	
	05.10.18	03.9.18			
		HIJIKATA	METROL LTD.	METROL.LTD	

REVISION 18.10.2005

¥H4A¥4A2110E